



Fastit[®] CLINCH NUT
SIZES

MECHANICAL JOINING SOLUTIONS FOR FUTURE GAINS



Fastit Clinch Nut sizes



Size (d)	Shank code	h Max.	Min. sheet thickness	Head diameter (D) ± 0.25	Body height (H) ± 0.25	Hole size $+0.08$	Min. dist. To edge
M2	0	0.77	0.8	6.35	1.5	4.22	4.8
	1	0.97	1				
	2	1.38	1.4				
M2.5	0	0.77	0.8	6.35	1.5	4.22	4.8
	1	0.97	1				
	2	1.38	1.4				
M3	0	0.77	0.8	6.35	1.5	4.22	4.8
	1	0.97	1				
	2	1.38	1.4				
M3.5	0	0.77	0.8	7.1	1.5	4.75	5.6
	1	0.97	1				
	2	1.38	1.4				
M4	0	0.77	0.8	7.95	2	5.41	6.9
	1	0.97	1				
	2	1.38	1.4				

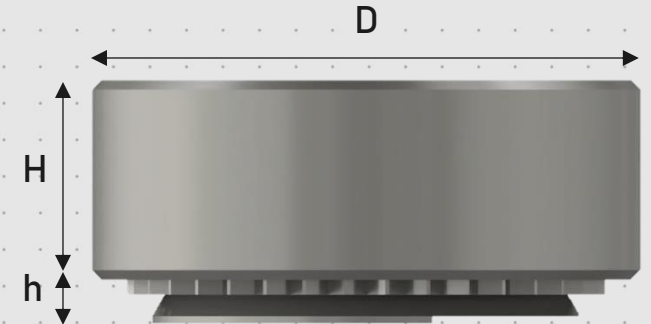



Fastit Clinch Nut sizes

Size (d)	Shank code	h Max.	Min. sheet thickness	Head diameter (D) ± 0.25	Body height (H) ± 0.25	Hole size $+0.08$	Min. dist. To edge
M5	0	0.77	0.8	8.75	2	6.35	7.1
	1	0.97	1				
	2	1.38	1.4				
M6	00	0.89	0.92	11.1	4.08	8.75	8.6
	0	1.15	1.2				
	1	1.38	1.4				
	2	2.21	2.29				
M8	1	1.38	1.4	12.65	5.47	10.5	9.7
	2	2.21	2.29				
M10	1	2.21	2.31	17.35	7.48	14	13.5
	2	3.05	3.18				
M12	1	3.05	3.18	20.55	8.5	17	16

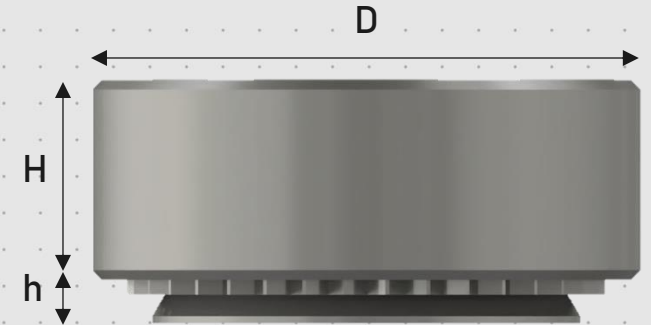



WHANT TO KNOW MORE?

Contact us at Fastit for a more detailed presentation and how we can help you with your challenges.

–

info@fastitsolution.se

+46 82 33 33 33