



Fastit[®]


FLUSH HEAD CLINCH SCREW SIZES



Fastit Flush Head Clinch Screw sizes

Size (d)	Length range (L) ±0.4	Head dia. (D) ±0.4	Unthreaded length (S) Max.	Min. Sheet thickness	Hole size +0.08	Min dist. from edge (e)
M2.5	6 – 25	4.1	1.95	1	2.5	5.4
M3	6 – 35	4.6	2.1	1	3	5.6
M3.5	8 – 35	5.3	2.25	1	3.5	6.4
M4	6 – 50	5.9	2.4	1	4	7.2
M5	8 – 50	6.5	2.7	1	5	7.2
M6	8 – 50	8.2	3.0	1.6	6	7.9
M8	12 – 60	9.6	3.7	2.4	8	9.6

Other sizes available on request

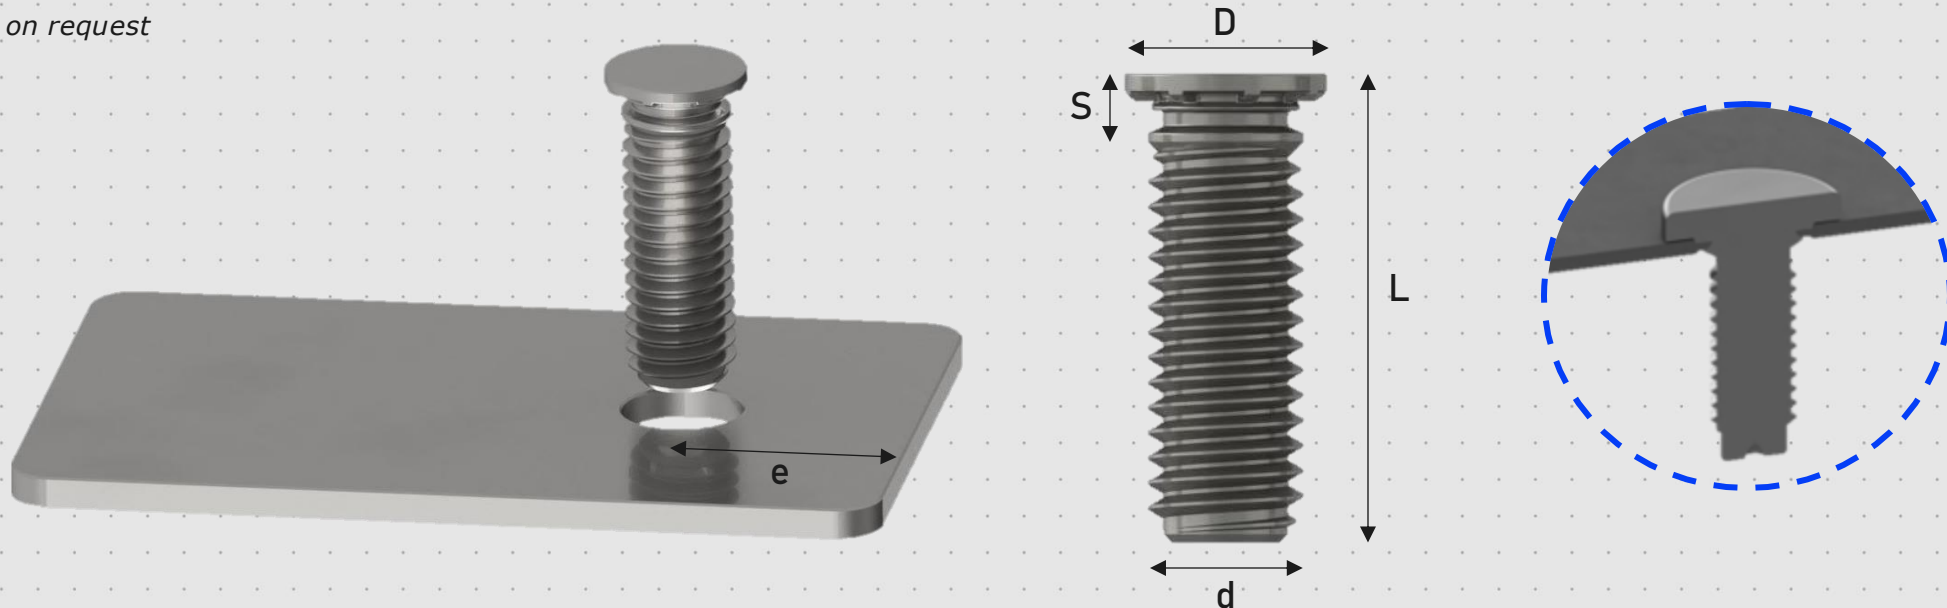



WHAT TO KNOW MORE?

Contact us at Fastit for a more detailed presentation and how we can help you with your challenges.

–

info@fastitsolution.se

+46 82 33 33 33