



Fastit[®]


HEAVY DUTY CLINCH SCREW SIZES



Fastit Heavy Duty Clinch Screw sizes

Size (d)	Length range (L) ± 0.4	Head dia. (D) ± 0.25	Head height (T) Max.	Unthreaded length (S) Max.	Min. Sheet thickness	Hole size $+0.13$	Min dist. from edge (e)
M5	15 – 50	7.8	1.14	2.7	1.3	5	10.7
M6	15 – 50	9.4	1.27	2.8	1.5	6	11.5
M8	15 – 50	12.5	1.78	3.5	2	8	12.7
M10	15 – 50	15.7	2.29	4.1	2.3	10	13.7

Other sizes available on request

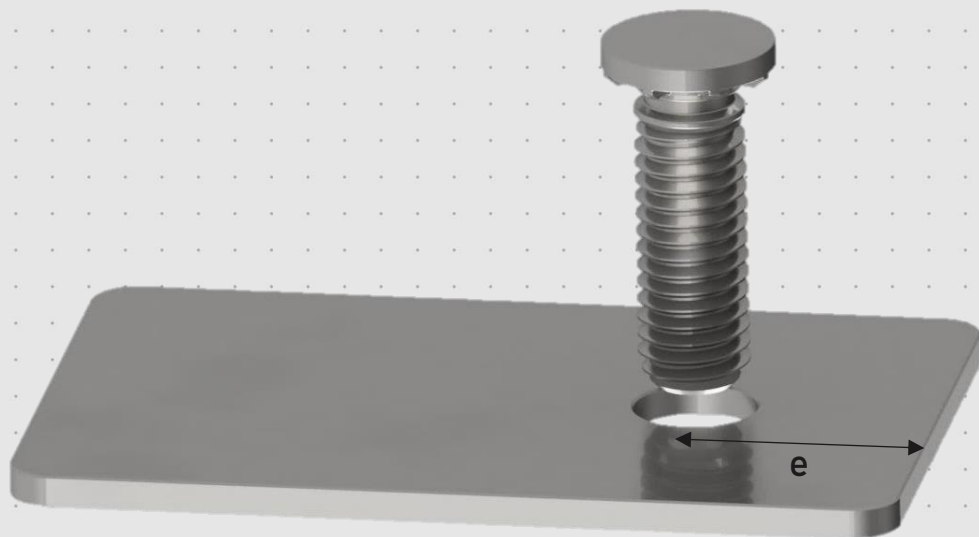



WHAT TO KNOW MORE?

Contact us at Fastit for a more detailed presentation and how we can help you with your challenges.

–

info@fastitsolution.se

+46 82 33 33 33