



Fastit[®]



REDUSED FLUSH HEAD CLINCH SCREW SIZES



Fastit Redused Flush Head Clinch Screw sizes

Size (d)	Length range (L) ±0.4	Head dia. (D) ±0.4	Unthreaded length (S) Max.	Min. Sheet thickness	Hole size +0.08	Min dist. from edge (e)
M2.5	6 – 25	3.15	2.1	1	2.5	2.8
M3	6 – 35	3.65	2.1	1	3	3.3
M4	6 – 40	4.65	2.4	1	4	4.3
M5	10 – 40	5.9	2.7	1	5	5.6

Other sizes available on request

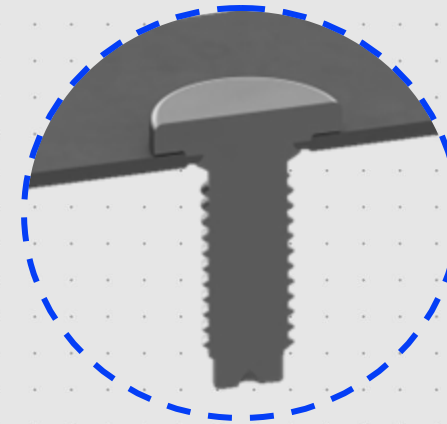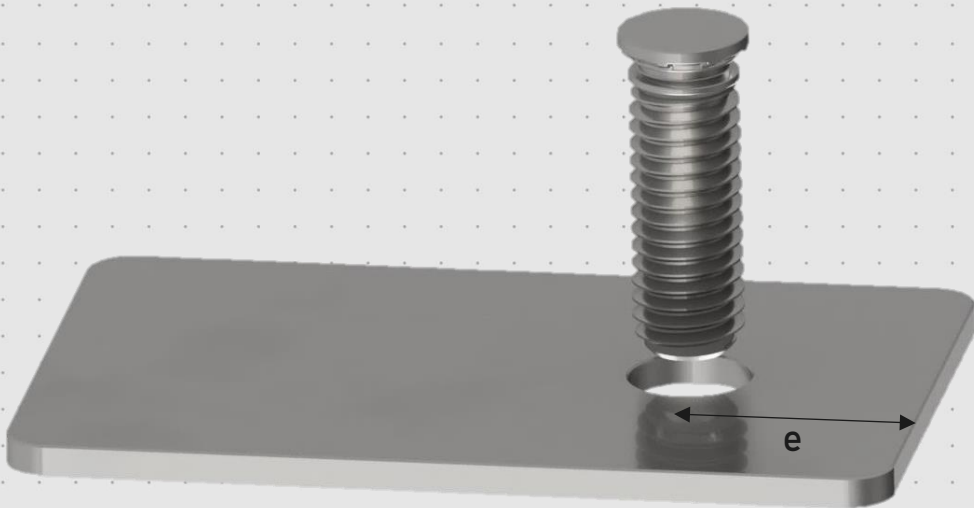



WHAT TO KNOW MORE?

Contact us at Fastit for a more detailed presentation and how we can help you with your challenges.

–

info@fastitsolution.se

+46 82 33 33 33